


Hotrunner-Heating System C6-R6 / C8-R8



- quick installation with simple tools possible
- shorter reaction times
- optimal heat transfer
- usual reliability
- short delivery time

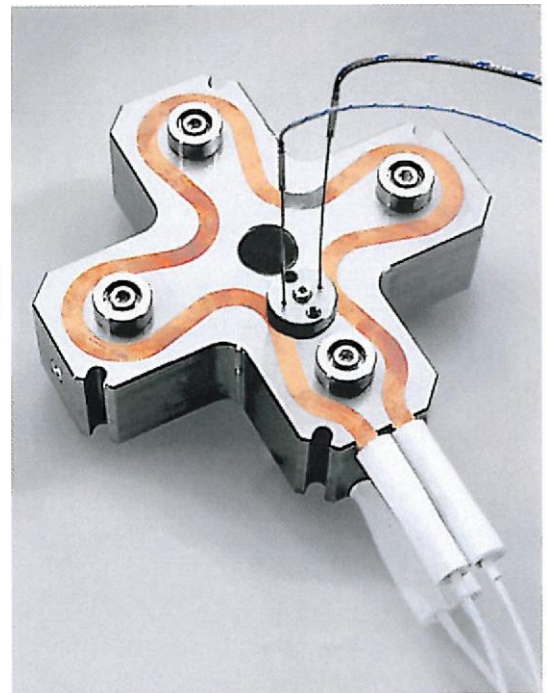

- Our R6 and RB tool heaters have proven themselves for years, making the most complex forms and extreme bends possible. In cooperation with the company DST Plastic tool technology, in Uetliburg, a new installation standard with curved copper profiles for hot runner distributor has been developed. These copper profiles are adapted to the particular shape of the Round heating. The quick installation is carried out by pressing with the simplest tools and subsequent surface treatment. This installation method guarantees optimum heat transfer resulting in shorter reaction times.
- During a revision, the copper profiles can be easily removed.
- Round heating elements R6 and RB as well as preformed copper profiles C6 and CS are available within a very short time delivery to your specific requirements.