

- Withstand temperatures upto 200°C
- Available in outputs upto 50W/m
- Can be cut to length at site
- Particularly suited to small bore pipework
- Full range of controls and accessories
- Available for 110/120 and 220/240VAC
- High Corrosion Resistance

FEATURES

Microtracer type EMTF is a medium temperature parallel resistance, constant wattage, cut-to-length heating tape that can be used for freeze protection or process heating.

It is particularly suited to small instrument impulse, analyser lines, or process pipes located in non-hazardous areas.


Microtracer type EMTF is chosen when short or moderate circuit lengths are required (select Minitracer if longer circuits are required).

The installation of EMTF heating tape is quick and simple and requires no special skills or tools. Termination and power connection components are all provided in convenient kits.

OPTIONS

EMTF..C Tinned copper braid provides mechanical protection for base heater and may be used when traced equipment does not provide an effective earth path.

EMTF..CF Fluoropolymer overjacket over tinned copper braid provides protection where corrosive chemical solutions of vapours may be present.

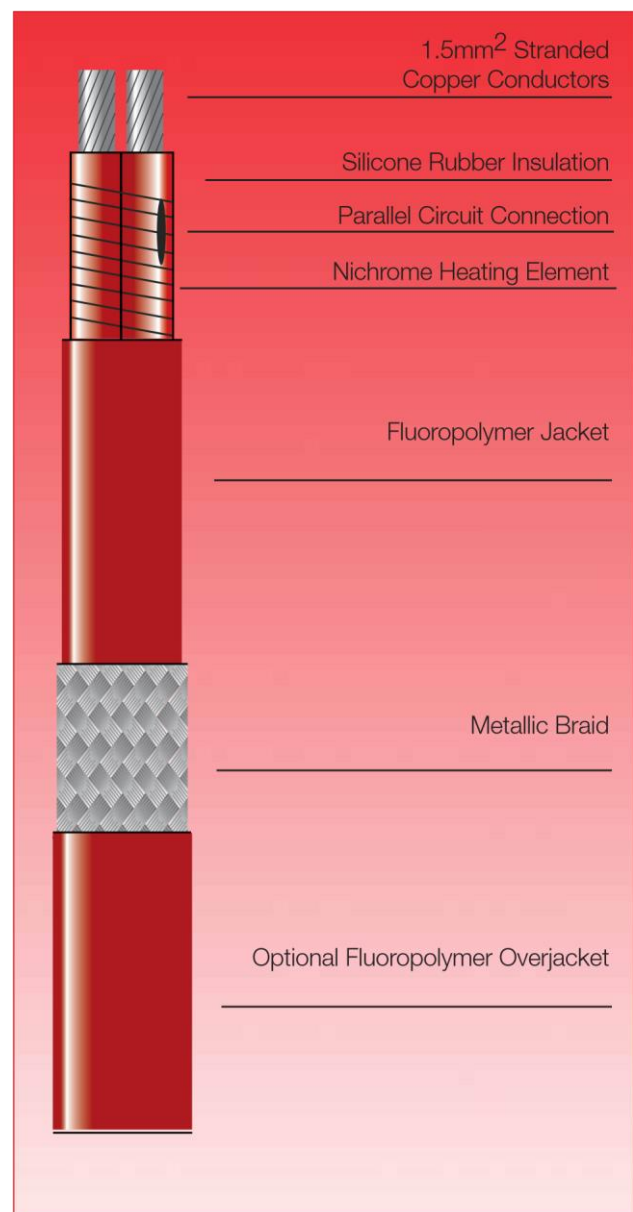

SPECIFICATION

MAXIMUM TEMPERATURE	Un-energised 200°C (392°F)
	Energised See Table

MINIMUM INSTALLATION TEMPERATURE	-80°C (-112°F)
---	----------------

POWER SUPPLY	220 - 240 VAC or 110 - 120 VAC
---------------------	-----------------------------------

WEIGHTS & DIMENSIONS

Type	Nom. Dims.	Weight	Min. Bending radius (mm)	Gland Size
Ref	(mm)	kg/100m		
EMTF	7.0 x 4.3	6.4	20	M16
EMTF..C	7.8 x 5.1	9.6	25	M16
EMTF..CF	9.0 x 6.3	12.0	30	M16

CONSTRUCTION

Grade	2.2 to BS6351:Part 1
Heating Element	Nickel Chromium
Power Conductors	Tin Plated Copper 1.5mm ²
Conductor Insulation	Silicone Rubber
Jacket	Fluoropolymer (FEP)
Braid	Tinned Copper
Overjacket (Optional)	Fluoropolymer (FEP)

ORDERING INFORMATION

Example	33 EMTF2-CF
Output 33W/m	
Microtracer type EMTF	
Supply Voltage 220 - 240 VAC	
Tinned Copper Braid	
Fluoropolymer overjacket	

ACCESSORIES

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. These items are recommended for the correct operation of EMTF products.

MAXIMUM PIPE / WORKPIECE TEMPERATURES

The surface of the heater must not exceed the maximum withstand temperature of its constructional materials. This is ensured by limiting the pipe or workpiece temperature to a safe level either by design calculation (a Stabilised Design) or by means of temperature controls.

For worst case conditions, the temperature of steel pipes should be limited to the following levels:-

MAXIMUM PIPE/WORKPIECE TEMPERATURES (°C)

HEATER NOMINAL OUTPUT (W/m)	MAXIMUM PERMISSIBLE PIPE TEMP (°C)		
	EMTF	EMTF-C	EMTF-CF
6.5	190	190	190
13	175	175	185
23	135	145	155
33	95	100	100
50	45	60	70

For conditions other than worst case, or pipes of other materials (eg. Plastic, Stainless Steel, etc.), consult Heat Trace Tolerances: Voltage +10%; Resistance +10%; -0%

Pipe temperatures higher than those given above may be accommodated by using Heat Trace Ltd voltage compensating devices eg. POWERMATCH™ - call for further details.

MAXIMUM CIRCUIT LENGTH

OUTPUT (W/m)	MAX. LENGTH*	CIRCUIT		ZONE LENGTH (NOM.)	
		115V	230V	115V	230V
6.5	82m	164m	1000mm	1500mm	
13	58m	116m	741mm	1100mm	
23	44m	87m	900mm	1000mm	
33	36m	73m	1000mm	950mm	
50	30m	59m	995mm	900mm	

*For ±10% end-to-end power output variation

POWER CONVERSION FACTORS

115V HEATING TAPE	230V HEATING TAPE
277V Multiply output by 5.80	277V Multiply output by 1.45
230V Multiply output by 4.00	240V Multiply output by 1.09
208V Multiply output by 3.27	220V Multiply output by 0.91
120V Multiply output by 1.09	208V Multiply output by 0.82
110V Multiply output by 0.91	115V Multiply output by 0.25



Backer ELC AG · Wynentalstrasse 1 · 5723 Teufenthal · Switzerland
Tel +41 62 837 62 80 · www.backerelc.ch

The information given herein, including drawings, illustrations and schematics (which are intended for illustration purposes only), is believed to be reliable. However, Backer ELC AG makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Backer ELC AG products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Backer ELC AG be liable for any damages arising out of the misuse, resale or use of the product.